


Series FT

Heavy duty PVC food grade
material handling hose
For dry or liquid applications

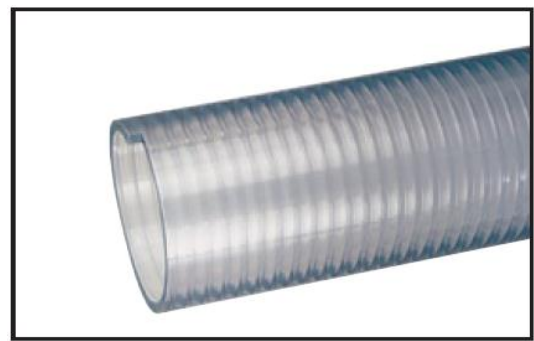

Features and Benefits

- **Clear PVC construction** — complies with all applicable FDA† and USDA★ requirements and 3-A Sanitary Standards¶... allows visual confirmation that material is flowing.
- **Smooth bore construction** — eliminates material build-up.
- **Smooth cover** — makes clamping easier.

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

General Applications

- Pneumatic conveying systems for powder, pellets or granular materials.
- Transfer of liquid or dry dairy products.
- Fish processing equipment.
- Syrup and juice transfer.
- Poultry cleaning operations.
- Wine making.

Service Temperature Range

-4° F to 150° F

Actual service temperature range is application-dependent.

Series	ID (In.)	Nominal		OD (In.)	OD (mm)	Working Pressure (PSI)		Vacuum Rating (In. Hg)		Approx. Bending Radius @ 68°F	Standard Length (Ft)	Approx. Wt. (lbs/ft.)
		ID (mm)	OD (mm)			68°F	104°F	68°F	104°F			
FT075	3/4	19.0	0.94	24.0		115	75	Full	28	3"	100	.17
FT100	1	25.5	1.28	32.5		100	70	Full	28	3"	100	.24
FT125	1 1/4	32.0	1.56	39.6		90	65	Full	28	4"	100	.44
FT150	1 1/2	38.1	1.80	46.5		85	60	Full	28	6"	100	.50
FT200	2	50.8	2.36	60.0		85	60	Full	26	8"	100	.71
FT250	2 1/2	63.5	2.88	73.2		65	45	Full	26	10"	100	.94
FT300	3	76.2	3.42	86.9		55	40	Full	24	11"	100	1.14
FT400	4	101.6	4.51	114.6		50	35	Full	24	18"	100/60	1.91
FT500	5	127.0	5.51	140.0		40	25	28	23	28"	20	2.41
FT600	6	153.4	6.59	167.4		30	20	28	15	48"	20	3.28
FT800	8	204.7	8.85	224.7		25	15	28	10	60"	20	5.67

Because we continually examine ways to improve our products, we reserve the right to alter specifications without notice.