

# Lighterweight, Economical Reels | Series RT




Made  
in USA

RT650-OLP  
Patent No. 7,150,425

## Medium Duty Spring Retractable Reels Air/Water/Oil/Grease - 1/4", 3/8", 1/2" I.D.

Series RT is an economical choice for a medium duty, lighter weight, spring-driven hose reel for applications that are less demanding, yet require a product that can withstand industrial and commercial use. The industrial-grade drive spring is protected from the environment in a polypropylene spool for longer service life. Guide arm adjusts to seven positions.

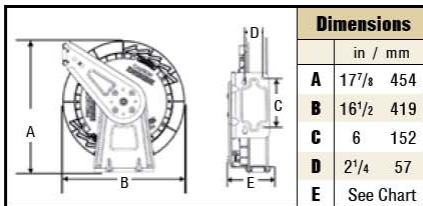

**NEW!**  
Nitrogen  
Reels  
RT650-OLPG-GN20



**NEW!**  
Side-Mount Reels  
RT650-OLPSM

Model with Hose	Shipping Weight lbs / kg	Pressure psi / bar	Hose I.D. in / mm	Hose O.D. in / mm	(M)NPTF Outlet in	(F)NPTF Inlet in	Hose Length ft / m	Model without hose & bumper	Shipping Weight lbs / kg	Pressure psi / bar	E in / mm
<b>Low Pressure Air/Water Reels</b> Maximum Temperature 150° F (65° C)											
RT425-OLP	19 9	300 21	1/4 6	.475 12	1/4	3/8	25 8	RT402-OLP	19 9	300 21	5 <sup>3</sup> / <sub>4</sub> 146
RT435-OLP	21 10	300 21	1/4 6	.475 12	1/4	3/8	35 11	RT403-OLP	19 9	300 21	5 <sup>3</sup> / <sub>4</sub> 146
RT450-OLP	24 11	300 21	1/4 6	.475 12	1/4	3/8	50 15	RT405-OLP	21 10	300 21	5 <sup>3</sup> / <sub>4</sub> 146
RT465-OLP	25 11	300 21	1/4 6	.475 12	1/4	3/8	65 20	-----	---	---	---
RT625-OLP	20 9	300 21	3/8 10	.600 15	1/4	3/8	25 8	RT602-OLP	19 9	300 21	5 <sup>3</sup> / <sub>4</sub> 146
RT635-OLP	21 10	300 21	3/8 10	.600 15	1/4	3/8	35 11	RT603-OLP	19 9	300 21	5 <sup>3</sup> / <sub>4</sub> 146
RT650-OLP	27 12	300 21	3/8 10	.600 15	1/4	1/2	50 15	RT605-OLP <sup>ca</sup>	22 10	300 21	6 <sup>1</sup> / <sub>4</sub> 159
RT825-OLP	26 12	300 21	1/2 13	.750 19	1/2	1/2	25 8	RT802-OLP	23 10	300 21	6 <sup>1</sup> / <sub>4</sub> 159
RT835-OLP	27 12	300 21	1/2 13	.750 19	1/2	1/2	35 11	RT803-OLP <sup>ca</sup>	23 10	300 21	6 <sup>1</sup> / <sub>4</sub> 159
RT850-OLP	37 17	300 21	1/2 13	.750 19	1/2	1/2	50 15	RT805-OLP	25 11	300 21	7 <sup>3</sup> / <sub>4</sub> 197
<b>Medium Pressure Oil Reels</b> Maximum Temperature 150° F (65° C)											
RT625-OMP	27 12	1000 69	3/8 10	.710 18	3/8	3/8	25 8	RT602-OMP	22 10	1000 69	5 <sup>3</sup> / <sub>4</sub> 146
RT635-OMP	30 14	1000 69	3/8 10	.710 18	3/8	3/8	35 11	RT603-OMP	22 10	1000 69	5 <sup>3</sup> / <sub>4</sub> 146
RT650-OMP	35 16	1000 69	3/8 10	.710 18	3/8	1/2	50 15	RT605-OMP	25 11	1000 69	7 <sup>3</sup> / <sub>4</sub> 197
RT825-OMP	31 14	1000 69	1/2 13	.850 22	1/2	3/8	25 8	RT802-OMP	23 10	1000 69	6 <sup>1</sup> / <sub>4</sub> 159
RT835-OMP	32 15	1000 69	1/2 13	.850 22	1/2	1/2	35 11	RT803-OMP	23 10	1000 69	6 <sup>1</sup> / <sub>4</sub> 159
<b>High Pressure Grease Reels</b> Maximum Temperature 150° F (65° C)											
RT425-OHP	28 13	5000 345	1/4 6	.580 15	1/4	3/8	25 8	RT402-OHP	22 10	5000 345	5 <sup>3</sup> / <sub>4</sub> 146
RT435-OHP	30 14	5000 345	1/4 6	.580 15	1/4	3/8	35 11	RT403-OHP	22 10	5000 345	5 <sup>3</sup> / <sub>4</sub> 146
RT625-OHP	30 14	4000 276	3/8 10	.730 19	3/8	3/8	25 8	RT602-OHP	22 10	5000 345	5 <sup>3</sup> / <sub>4</sub> 146
RT635-OHP	34 15	4000 276	3/8 10	.730 19	3/8	1/2	35 11	RT603-OHP	22 10	5000 345	6 <sup>1</sup> / <sub>4</sub> 159
RT650-OHP	46 21	4000 276	3/8 10	.730 19	3/8	1/2	50 15	RT605-OHP	25 11	5000 345	7 <sup>3</sup> / <sub>4</sub> 197

Low pressure reels furnished standard with PVC hose. Medium pressure reels furnished standard with S.A.E. 100 R1T one wire braid hose. High pressure reels furnished standard with S.A.E. 100 R2T two wire braid hose, suitable for grease applications only.

Models listed with an icon can be shipped same day upon request when the order is received by 11:30 AM local time for quantities of 5 or fewer.

Indiana Warehouse

California Warehouse

Indiana & California  
Warehouses

Canadian Warehouse