

# Pressure Wash Hose Reels | Series PW / H18006 / 30000

## Spring driven

Pressure up to 5000 PSI and up to 100 feet of hose

PW7650 OHP



CA38106 M

### Applications

- Agricultural
- Marine
- Equipment cleaning
- Pressure washing
- Much more

Made in USA 

## Hand crank

Pressure up to 5000 PSI and up to 425 feet of hose

	in / mm			Shipping Weight	Size Index No.
	1/4	3/8	1/2		
<b>Hose I.D.</b>	6	10	13		
<b>Hose O.D.</b>	530	688	845		
<b>Model without hose &amp; bumper*</b>	<b>Hose Length</b>			lbs / kg	
	ft / m	ft / m	ft / m		
<b>Spring Driven</b> Pressure 5000 psi / 345 bar					
PW7600 OHP	---	50 15	---	43 20	1
PW7650 OHP*	---	50 15	---	50 23	1
PW81000 OHP	---	100 30	---	86 39	2
<b>Hand Crank</b> Pressure 5000 psi / 345 bar					
H18006 M	150 46	100 30	---	31 14	3
CA38106 M	200 61	140 43	100 30	41 19	4
CA38112 M	425 130	300 91	200 61	46 21	5
<b>Electric Motor Driven</b> Pressure 5000 psi / 345 bar					
EA38106 M12D	200 61	140 43	100 30	63 29	6
EA38112 M12D	425 130	300 91	200 61	71 32	7

\*Hose included - max temperature 212°F (100°C); Max temperature for models without hose 400°F (200°C). PSI rating based upon 2.4 to 1 safety factor.


## Spring Retractable, Hand Crank, Motor Driven

Air/Water - 1/4", 3/8", 1/2" I.D.

Compact design and quality steel construction are incorporated into Reelcraft's full line of pressure wash reels, rated up to 5000 PSI. Series PW, H18006 and 30000 reels are able to carry 50 to 425 feet of tangle-free hose and are complete with a high pressure water swivel for maximum product delivery. The high pressure water swivel is designed to handle a broad range of pressures, temperatures and chemicals; perfect for agricultural/marine, equipment cleaning and pressure washing applications.

Dimensions - 7000 & 80000				
No.	1		2	
	in / mm		in / mm	
<b>A</b>	19	483	24	610
<b>B</b>	20 <sup>1</sup> / <sub>4</sub>	514	25 <sup>3</sup> / <sub>8</sub>	645
<b>C</b>	7	178	8 <sup>3</sup> / <sub>16</sub>	211
<b>D</b>	7	178	10 <sup>1</sup> / <sub>2</sub>	267
<b>E</b>	7 <sup>7</sup> / <sub>8</sub>	200	10	254
<b>F</b>	3 <sup>7</sup> / <sub>8</sub>	98	6	152

Four 1/2" (12.7mm) mounting holes.

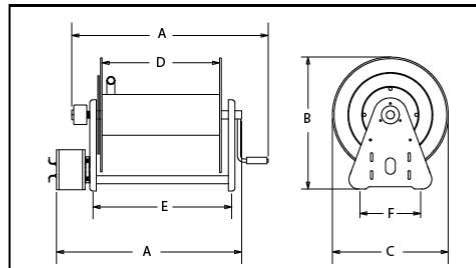

Dimensions - Series H & 30000						
No.	3	4	5	6	7	
	in / mm		in / mm		in / mm	
<b>A</b>	18	457	19	483	25	635
<b>B</b>	19	483	20 <sup>1</sup> / <sub>4</sub>	514	20 <sup>1</sup> / <sub>4</sub>	514
<b>C</b>	20	506	17 <sup>3</sup> / <sub>4</sub>	425	17 <sup>3</sup> / <sub>4</sub>	425
<b>D</b>	9 <sup>3</sup> / <sub>8</sub>	244	6	152	12	305
<b>E</b>	10	254	9 <sup>3</sup> / <sub>4</sub>	248	15 <sup>3</sup> / <sub>4</sub>	400
<b>F</b>	15	381	9	229	9	229

\*"A" is overall length. Four 1/2" (12.7mm) diameter mounting holes.