

King Safety Cables

When hose, couplings or clamps fail, or there is an accidental separation of the assembly, King safety cables minimize damage to equipment and injuries to operators. King safety cable reaches across the hose fittings to provide standby safety for hose. Spring-loaded loops in the cable ends open easily to pass over the couplings for a firm grip on the hose. Thoroughly tested with years of service. A positive safeguard for air hose connections - helps you meet today's safety standards. *King safety cable must be installed in the extended position (no slack).*

**SAFETY
ALERT**

Features:

- hose-to-hose or hose-to-rigid outlet
- King cable is the low cost answer to eliminate injuries caused by broken air hose connections
- highly resistant to rust and corrosion
- no tools needed - easy to install and remove
- max. working pressure: **200 PSI**



Style WSR, for hose-to-tool service

Hose ID	Cable	Length	Max. Work. Press. PSI	Steel		Stainless Steel	
				Part #	Price/E	Part #	Price/E
½" - 1¼"	1/8"	20¼"	200	WSR1	\$18.25	WSR1SS	\$47.75
½" - 2"	3/16"	28"	200	WSR3	26.20	---	---
1½" - 3"	1/4"	38"	200	WSR2	28.80	WSR2SS	100.75
4"	3/8"	44"	200	WSR4	63.75	---	---



Style W, for hose-to-hose service

Hose ID	Cable	Length	Max. Work. Press. PSI	Steel		Stainless Steel	
				Part #	Price/E	Part #	Price/E
½" - 1¼"	1/8"	20¼"	200	WB1	\$18.25	WB1SS	\$50.50
½" - 2"	3/16"	28"	200	WB3	27.05	---	---
1½" - 3"	1/4"	38¼"	200	WA2	29.70	WA2SS	106.00
4"	3/8"	44"	200	WA4	63.80	---	---

Note: Cables are shipped with safety restraint labels attached. Labels are not pictured.

King Safety Cable Options




WSR1E
WSR1E with stainless steel marine eye



WB1C
WB1 with safety clip and lanyard



correct installation

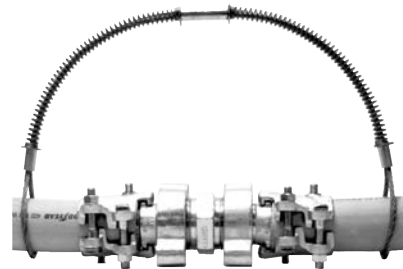

incorrect installation

**SAFETY
ALERT**

Cable	Part #	Description	Max. Working Pressure PSI	Price/E
1/8"	WSR1C	WSR1 with safety clip and lanyard used to lock Air King couplings	200	\$31.75
1/8"	WB1C	WB1 with safety clip and lanyard used to lock Air King couplings	200	31.20
1/8"	WSR1E	WSR1 with stainless steel safety marine eye used to connect safety cable to a bolt on tool	200	52.70
1/4"	WA2B	WA2 with bronze/copper ferrule for special environmental conditions	200	59.50

See page 5 for OSHA regulations.

Spring Guard



Protects hose against the effects of flexing at its most vulnerable point - immediately behind the coupling. End 'tang' allows end guard to be secured under a clamp or ferrule. Made of half-round galvanized steel wire to fit hose OD's from 7/8" to 3-1/4".

Guard ID	Hose OD		Wire Gauge	Over All Length	Tang Length	Approx. # of Coils	Galvanized Steel	
	From	To					Part #	Price/E
¾"	7/8"	15/16"	0.175	12"	1"	33	SEGC1-0.75-12	\$9.00
1"	15/16"	1-1/4"	0.175	12"	1"	33	SEGC1-1.00-12	10.00
1¼"	1-1/4"	1-1/2"	0.175	14"	2"	39	SEGC1-1.25-14	12.00
1½"	1-1/2"	1-3/4"	0.175	14"	2"	39	SEGC1-1.50-14	14.00
1¾"	1-3/4"	2"	0.175	16"	2"	44	SEGC1-1.75-16	16.00
2"	2"	2-1/2"	0.280	16"	2"	44	SEGC1-2.00-16	20.00
2½"	2-1/2"	3"	0.280	18"	2"	50	SEGC1-2.50-18	25.00
3"	3"	3-1/4"	0.280	18"	2"	50	SEGC1-3.00-18	30.00