



Cam & Groove

Fittings

Female/Male Cam Insert

- Standard insert: Solid metal or plastic
- PFA *Teflon*® encapsulated — injection molded high purity PFA *Teflon*® over entire hose shank and throughout wetted areas of fitting
- PTFE *Teflon*® Flared-Through — hose liner extends through the insert and is flared over the face under the cam gasket on the female cam only

Cam & Groove

PART # EXAMPLE: FCG-08-SS

FCG = Female Cam & Groove (swivel)

FCGL = Female Cam & Groove (swivel)
with locking handles

MCG = Male Cam & Groove

Sizes Available

3/4" - 08*	2" - 32
3/4" - 12	3" - 48
1" - 16	4" - 64**
1-1/2" - 24	

Standard Insert Material

SS - 316 Stainless Steel

TEF - *Teflon*® Encapsulated

Custom Insert Material

H - Hastelloy®

K - Kynar®

M - Monel®

PP - Polypropylene

*1/2" hose with actual 3/4" cam fitting

**Not available in *Teflon*® Encapsulated

Rotating Female Cam Body

316 SS is standard. Custom materials are available. Female cams are available with standard or locking handle systems.

Female Cam Body Options

SS - 316 Stainless Steel

Female Cam Body Custom Options

H - Hastelloy®

K - Kynar®

M - Monel®

PP - Polypropylene




Stainless Steel Cam & Groove



Teflon® PFA Encapsulated Cam & Groove

Stainless Steel Cam & Groove Pressure Ratings

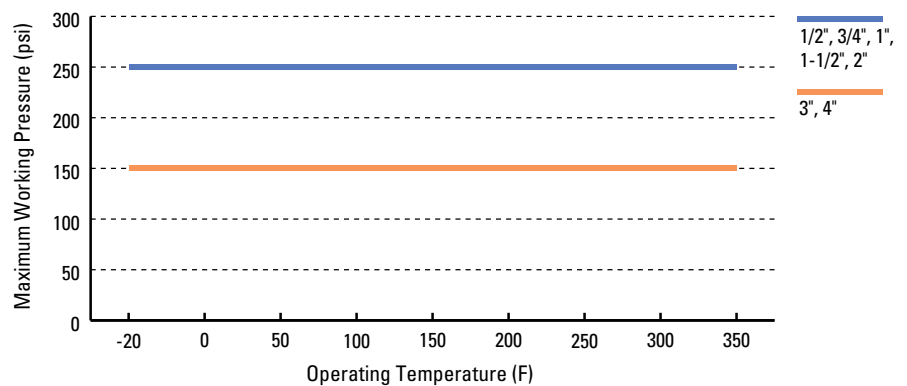

NOTE: Liquid service only.



Flange X Cam Adapter PFA Encapsulated

Sizes available: 3/4\" through 3\", rotating flanges all materials (see page 23). Available Flange X Male Cam and Flange X Female Cam. Consult factory for information.