



Flanged (Rotating)

Fittings

Flange Retainer Insert

- Standard retainer: Solid metal or plastic
- *Teflon*® PFA encapsulated: Injection molded high purity *Teflon*® PFA over entire hose shank and throughout wetted areas of fitting
- *Teflon*® PTFE flared-through: Hose liner extends through the retainer and is flared over the face

Rotating Flanges

- 150# and 300#

Flange Retainer

PART # EXAMPLE: FR-08-SS

FR = Flange Retainer

Sizes Available

1/2" - 08*	2" - 32
3/4" - 12	3" - 48
1" - 16	4" - 64*
1-1/2" - 24	

Standard Material

FT	- Flared Through
H	- Hastelloy®
M	- Monel®
SS	- 316 Stainless Steel
TEF	- <i>Teflon</i> ® Encapsulated

Custom Material

K	- Kynar®
CP	- CPVC
PP	- Polypropylene
ST	- Solid <i>Teflon</i> ®

FLANGE OPTION, 150# AND 300# FLANGE

DI	- Ductile Iron
E	- Carbon Steel Epoxy Coated
M	- Monel®
SS	- 316 Stainless Steel

Custom Flange Option

H	- Hastelloy®
K	- Kynar®
P	- PVDF
PP	- Polypropylene
ST	- Solid <i>Teflon</i> ®

*Not available in *Teflon*® Encapsulated



Standard Retainer




Encapsulated




Flared Through

150# Flange Pressure Ratings

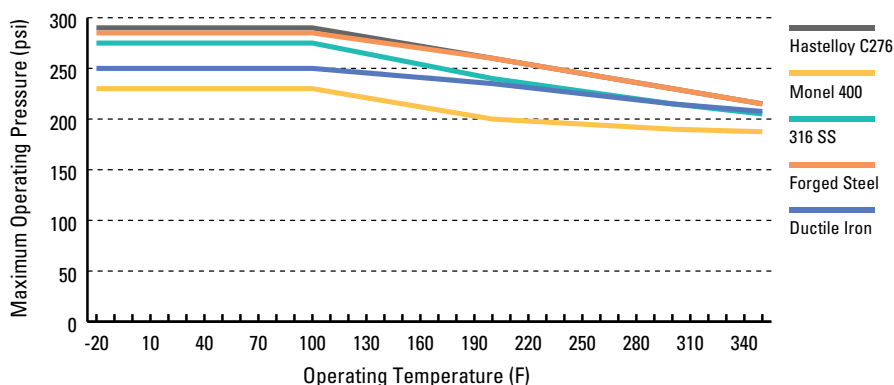

300# Flange Pressure Ratings

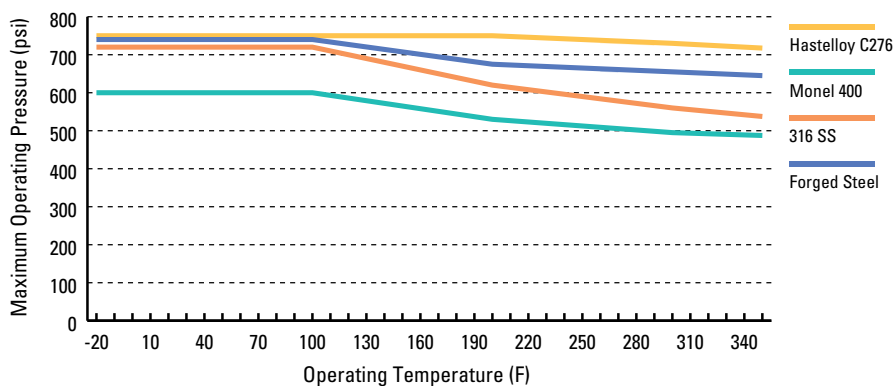

Ductile Iron



Plastic



Stainless



Epoxy Coated
Carbon Steel